arXiv:1208.2592v1 [quant-ph] 13 Aug 2012

Experimental realization of three-color entanglement at optical fiber communication and atomic storage wavelengths

Xiaojun Jia, Zhihui Yan, Zhiyuan Duan, Xiaolong Su, Hai Wang, Changde Xie and Kunchi Peng*
State Key Laboratory of Quantum Optics and Quantum Optics Devices,
Institute of Opto-Electronics, Shanxi University, Taiyuan, 030006, People's Republic of China

Multi-color entangled states of light including low-loss optical fiber transmission and atomic resonance frequencies are essential resources for future quantum information network. We present the experimental achievement on the three-color entanglement generation at $852\ nm$, $1550\ nm$ and $1440\ nm$ wavelengths for optical continuous variables. The entanglement generation system consists of two cascaded non-degenerated optical parametric oscillators (NOPOs). The flexible selectivity of nonlinear crystals in the two NOPOs and the tunable property of NOPO provide large freedom for the frequency selection of three entangled optical beams, so the present system is possible to be developed as practical devices used for quantum information networks with atomic storage units and long fiber transmission lines.

PACS numbers: 03.67.Bg, 03.67.Mn, 42.65.Yj, 42.50.Dv

During the past twenty years the proof-of-principle demonstrations of various quantum information protocols have been experimentally achieved by utilizing the discrete-variable (DV) quantum states of single photons [1, 2] or the continuous-variable (CV) quantum states of optical modes [3, 4]. Toward practical applications in the real-world we have to establish quantum information networks (QINs) involving both light and matter atoms, where light is used for communicating among distant nodes consisting of matter atoms [5]. The atomic systems in network nodes serve as the storages of quantum information. It is essential to prepare multi-color entangled states of light with fiber transmission and atomic transition frequencies for developing QIN.

Non-degenerate optical parametric oscillators (NOPOs) above the threshold are the most successful devices for producing multi-color CV entangled optical beams in the achieved experiments of quantum optics [6–10]. It has been well-known that a pair of the output signal and idler optical modes from a NOPO below or above the threshold form a two-mode entangled state with the quantum correlations of both amplitude and phase quadratures and this type of entangled stats has been extensively applied in the experiments of CV quantum information [11–15]. Two-color entangled optical beams at different frequency regions have been experimentally prepared by means of above-threshold NOPOs with various pump lasers and nonlinear crystals [6, 7, 16]. Recent years, for satisfying the requirements of the developing QIN the generation schemes of multi-color (more than two colors) CV entangled states via intra-cavity nonlinear processes have been theoretically proposed [17–21]. In 2009, the first CV three-color entangled state was experimentally produced by an above-threshold NOPO at a low temperature of $-23\ ^0C$ [10]. The three entangled submodes in this experiment are the output signal, idler and reflected pump modes from a NOPO and their wavelengths are $1062.102\ nm$, $1066.915\ nm$ and $532.251\ nm$, respectively. For fitting special frequency requirements of different physical systems in QINs, the generation systems of multi-color entangled state with better frequency selectivity are desired. Cassemiro and Villar proposed a chain configuration of two NOPOs to prepare multi-color CV entangled, in which the pump field reflected by the first NOPO is used for the pump laser of the second NOPO [19]. Since the pump lasers of the two NOPOs are the same, the frequency selectivity and versatility of the chain system are limited, sometimes. In 2010, the DV entangled state of triple photons at three different wavelengths of 848, 1590 and 1510 nm are experimentally produced by a cascaded spontaneous parametric down-conversion process in two different nonlinear crystals [22]. Transferring the scheme producing three-color DV entangled photons to CV regime, our group proposed a generation system of CV three-color entangled optical beams, in which two cascaded NOPO1 and NOPO2 are utilized [20]. One of the entangled signal and idler beams output from NOPO1, is used for the pump light of NOPO2. The three-color entangled among signal and idler beams produced by NOPO2 and the retained another output beam from NOPO1, is theoretically demonstrated and optimal operation conditions of the cascaded NOPOs system are numerically calculated in Ref. [20]. Following the theoretical design we have achieved the experimental generation of three-color CV entangled state by using the cascaded NOPOs system for the first time. Through the special selections of the pump laser and the nonlinear crystals in the two NOPOs, the wavelength of one of the obtained three-color entangled beams is $852\ nm$ which can be tuned to a transition frequency of Cesium atoms thus can be used for the storage of quantum information. The wavelengths of other two beams are $1550\ nm$ matched for optimal transmission in optical fibers and $1440\ nm$ close to fiber window with quite low (although not optimal) transmission losses [23]. The produced three-color CV entangled states are suitable to be applied in the future quantum information networks containing both atomic storage units and optical fiber communication.

At first we briefly introduce the experimental principle. Fig.1 is the principle schematic of the three-color entanglement generation system, which consists of NOPO1 and

---

*Electronic address: kcpeng@sxu.edu.cn

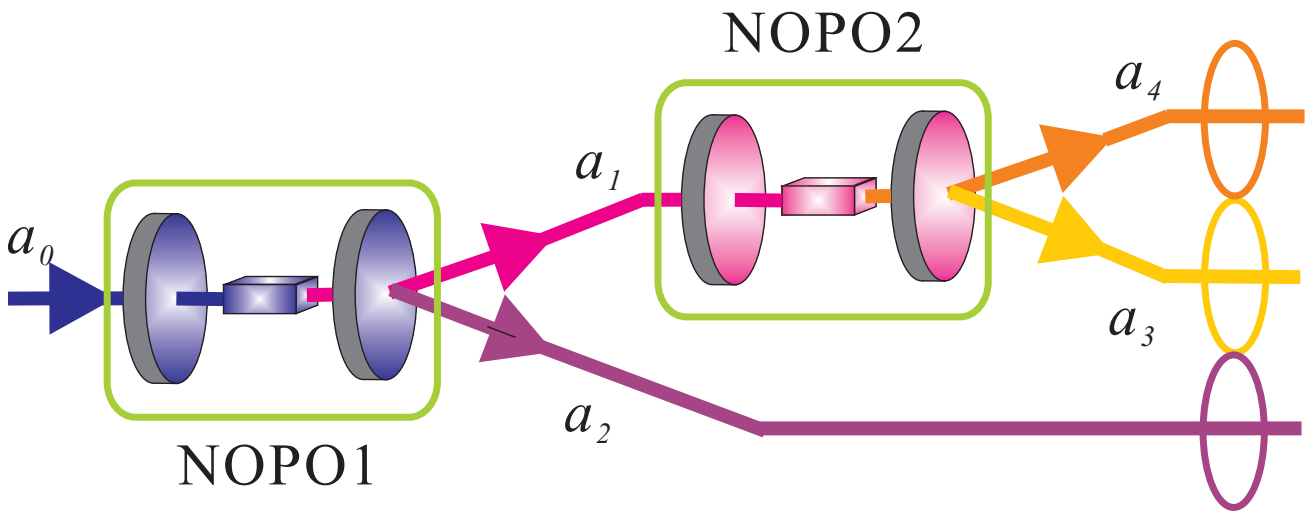

FIG. 1: (Color online) The principle schematic of the three-color entanglement generation system.

NOPO2. The NOPO1 is pumped by a laser (a_0) to create a pair of intense optical beams (a_1 and a_2), the frequencies of which fulfill energy conservation $\omega_0 = \omega_1 + \omega_2$, where the subscripts $j = 0, 1, 2$ designate the pump beam and the two generated down-conversion optical beams, respectively. One of the generated optical beams (a_1) drives the NOPO2 to achieve the cascaded intra-cavity optical parametric down-conversion and produce the output fields a_3 (ω_3) and a_4 (ω_4), the frequency sum of which equals to ω_1 ($\omega_1 = \omega_3 + \omega_4$). It has been theoretically proved in Ref. [22] that the three final output light beams (a_2, a_3 and a_4) originating from a single pump beam (a_0) have strong intensity correlation. On the other hand, the frequency constraint among the three optical modes translates into a constraint for the phase variations, so the phase fluctuations of the optical modes a_1 and a_2 (a_3 and a_4) should be anti-correlated each other, the sum of their phase fluctuations should be correlated with the phase fluctuation of the pump field. The experimental criteria in terms of the variances of particular combinations of the amplitude and phase quadratures for testing genuine CV multipartite entanglement among optical modes have been given by Loock and Furusawa [24]. A set of the criterion inequalities for determining the CV tripartite entanglement is expressed by:

$$\begin{aligned}\Delta_1 &= \langle\delta^2(X_3 - X_4)\rangle + \langle\delta^2(g_1Y_2 + Y_3 + Y_4)\rangle \geq 4,\\ \Delta_2 &= \langle\delta^2(X_2 - X_4)\rangle + \langle\delta^2(Y_2 + g_2Y_3 + Y_4)\rangle \geq 4,\\ \Delta_3 &= \langle\delta^2(X_2 - X_3)\rangle + \langle\delta^2(Y_2 + Y_3 + g_3Y_4)\rangle \geq 4.\end{aligned} \tag{1}$$

Where, ”4” is the boundary to verify the full inseparability of the genuine tripartite entanglement. The X_j and Y_j ($j = 2$, 3, 4) represent the amplitude quadratures and the phase quadratures of the resultant output modes a_2, a_3 and a_4, respectively. Each pairs of X_j and Y_j satisfy the canonical commutation relation $[X_j, Y_j] = 2i$. The g_j ($j = 1$, 2, 3) are the parameter gain to maximally violate the inequalities. The theoretical analysis has demonstrated that if any two inequalities in the set of inequalities (1) are simultaneously violated the three optical modes a_2, a_3 and a_4 are in a CV entangled state [20, 24].

The experimental setup is shown in Fig. 2. The coherent optical field at 795 nm from a continuous-wave Ti: Sapphire laser (MBR110, Coherent Ltd.) is frequency-doubled by a second harmonic generator (SHG) to obtain the light at 398 nm. The SHG has a ring cavity configuration consisting of two flat mirrors M1 and M2 as well as two concave

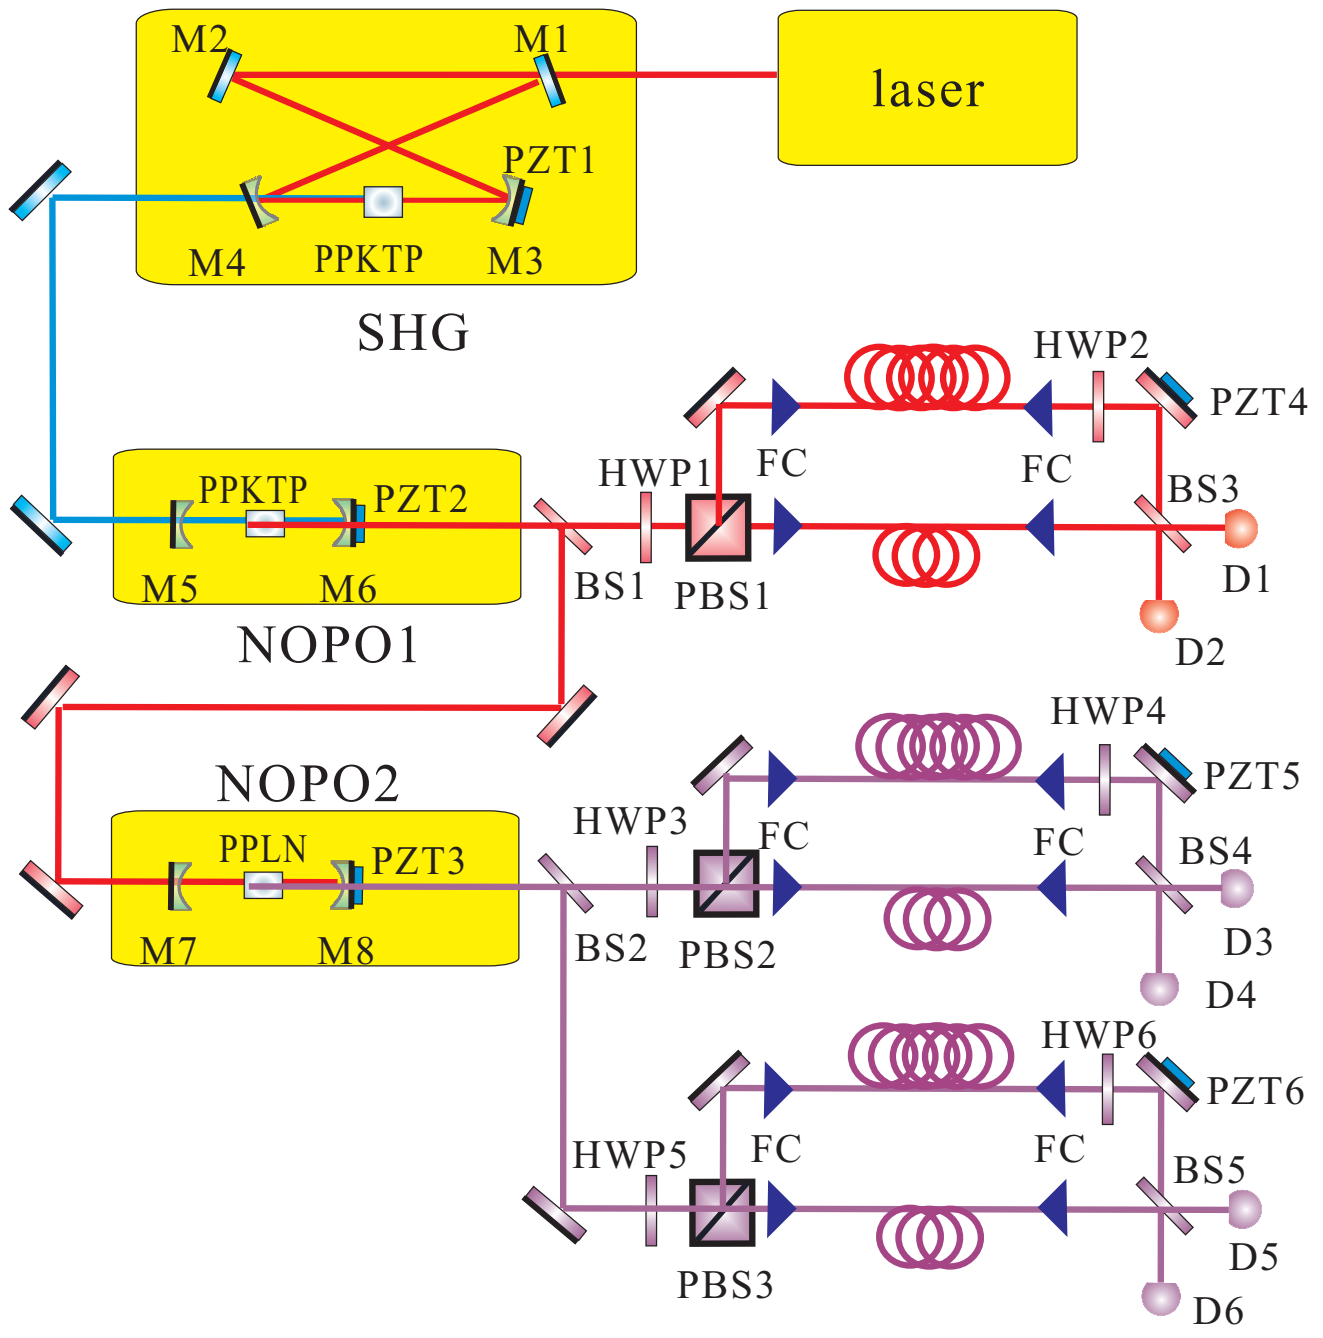

FIG. 2: (Color online) Schematic of the experimental setup. Laser: Ti: Sapphire laser; NOPO$_{1-2}$: non-degenerate optical parametric oscillator; M$_{1-8}$: different mirror; BS$_{1-5}$: different beam splitter (see context for detailed); HWP: half wave plate; FC: fiber coupler; PZT$_{1-6}$: piezoelectric transducer; D$_{1-6}$: high efficiency detector for different eavelength.

mirrors M3 and M4 with 100-mm radius of curvature, and a nonlinear crystal PPKTP (Periodic Poled Potassium Titanyl Phosphate) is placed at the center between M3 and M4. The mirror M1 is utilized as the input coupler with the transmissivity of 11.8% at 795 nm and high reflectivity at 398 nm, the M4 is used for the output coupler with high reflectivity at 795 nm and high transmissivity at 398 nm, and the other two mirrors M2 and M3 have high reflectivity at 795 nm. M3 is mounted on a piezoelectric transducer (PZT1) for scanning or locking actively the length of the optical cavity of SHG according to the need of the experiment. The $1 * 2 * 10\ mm^3$ PPKTP crystal with dual-end anti-reflection at 795 nm and 398 nm is temperature-controlled at 51.07 ^0C to meet the optimal matching condition for the frequency-doubling process. Both NOPO1 and NOPO2 are in a Fabre-Perot cavity configuration consisting of two concave mirrors with a 50-mm radius curvature (M5 and M6 for NOPO1, M7 and M8 for NOPO2). For obtaining the desired frequencies two different nonlinear crystals are chosen respectively for the two NOPOs, which are $1 * 2 * 10\ mm^3$ PPKTP for NOPO1 and $1 * 2 * 10\ mm^3$ PPLN (periodically poled lithium niobate) for NOPO2. The two nonlinear crystals are respectively placed inside an oven, the temperature of which can be well-controlled and tuned by an electronic temperature-controller with the precision of 0.01 ^0C (YG-IIS-RA, Yuguang Ltd.). M5 (M7) is used for the input coupler of NOPO1 (NOPO2) with the transmissivity of 30% (10%) at 398 nm (746 nm) and the high reflectivity at 746 nm and 852 nm (1440 nm and 1550 nm). M6 (M8) is utilized as the output coupler with the high reflectivity at 398 nm (746 nm) and the transmissivity of 3.0% (4.0%) at 746 nm and 852 nm (1440 nm and 1550 nm). M6 (M8) is mounted on PZT2 (PZT3) for scanning actively the cavity length of NOPO1 (NOPO2) or locking it on the resonance with the generated sub-harmonic modes as needed. The cavity length, the finesse and the threshold pump power for NOPO1 (NOPO2) are 101.5 mm (101.9 mm), 195 for 746 nm (149 for 1550 nm) and 75 mW (4.5 mW), respectively.

Three M-Z interferometers with unbalanced arm lengths are applied to measure the noise powers of the phase and the amplitude quadratures for the three resultant subharmonic modes at 852 nm (generate by NOPO1), 1440 nm and 1550 nm (generated by NOPO2) as well as to determine the corresponding quantum noise limits (QNLs) [7, 25]. The three interferometers have the identical configuration, each of which consists of a polarizing-beam-splitter (PBS1-3), two high reflection mirrors and a 50/50 beam-splitter (BS3-5). A PZT (PZT4-6) is mounted on a reflection mirror of the interferometer for locking the relative phase between the long and the short arms of the unbalanced interferometer to the required value. The half-wave plate (HWP1-6) is used for aligning the polarization direction of the optical mode. Two polarization-preserved optical fibers with different lengths, in each endface of which a fiber-coupler (FC) is attached, serve as the long and the short arms of the interferometer, respectively. The noise powers of the output optical beams from the interferometers are detected by the photo-diodes (D1-D6). It has been well-proved in Refs. [7, 25], when the input optical beams only passes through the short arm of the interferometer, the sum and the difference of the photo-currents detected by a pair of D1 and D2, (also D3 and D4, D5 and D6) are the noise power of the amplitude quadrature of the input beam and the corresponding QNL, respectively. If keeping the optical phase difference between the long and the short arms at $\pi/2+2k\pi$ (k is an integer) and splitting equally the input optical beam in the two arms of the interferometer, the difference (sum) of the photo-currents detected by a pair of the detectors is the noise power of the phase quadrature of the input beam (corresponding QNL). On the other hand, for implementing the noise power measurement of an input optical beam at a specific noise sideband (f), the phase shift (θ) of the spectral component at $\Omega = 2\pi f$ between the two arms of the M-Z interferometer should be controlled at $\theta = n\Omega\Delta L/c = \pi$ (ΔL is the length difference between the two arms; c is the speed of the light; n is the refraction index of the transmission medium) [7, 25, 26]. For our experiment, the measured noise sideband frequency is $f = 2\ MHz$, so ΔL should be 48 m. The noise powers measured simultaneously by the three M-Z interferometers are combined by the positive or negative power combiners according to the requirements of Eqs (1) and then the combined correlations variances of the amplitude and the phase quadratures are analyzed by a spectrum analyzer (not drawn in Fig. 2).

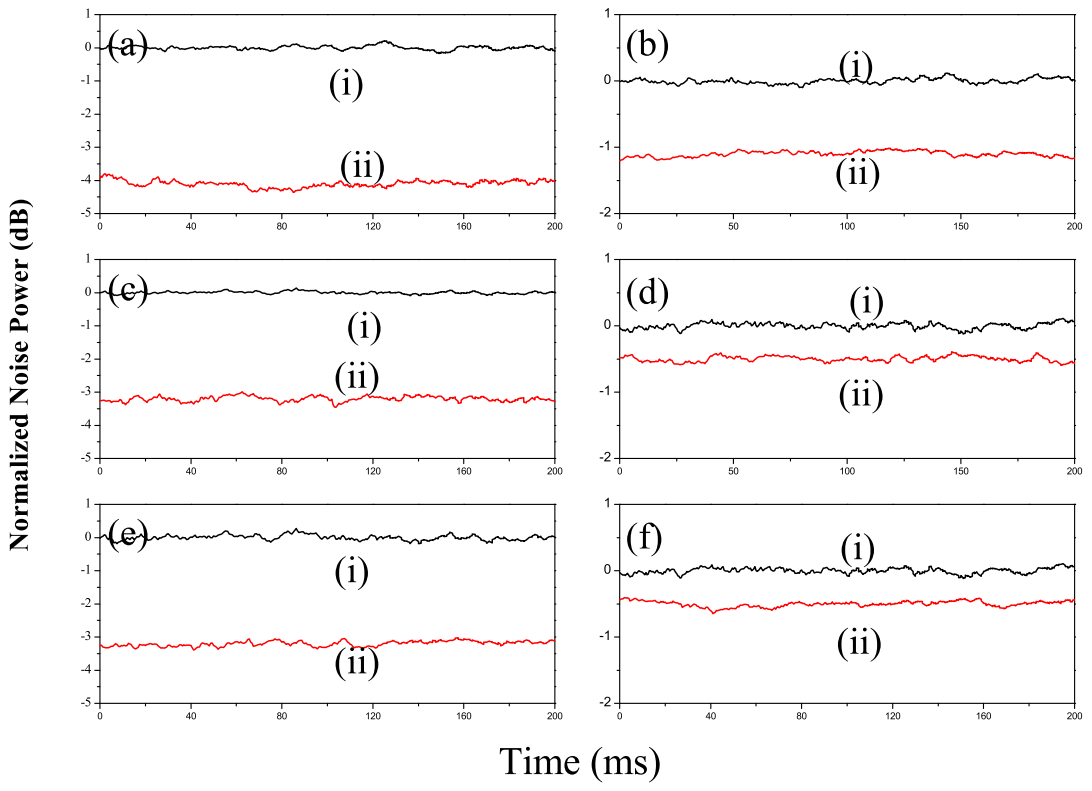

FIG. 3: (Color online) The measured correlation variance of three-color entangled states at 2 MHz. **a**, $\langle\delta^2(X_3-X_4)\rangle$, **b**, $\langle\delta^2(g_1^{opt}Y_2+Y_3+Y_4)\rangle$, **c**, $\langle\delta^2(X_2-X_4)\rangle$, **d**, $\langle\delta^2(Y_2+g_2^{opt}Y_3+Y_4)\rangle$, **e**, $\langle\delta^2(X_2-X_3)\rangle$, **f**, $\langle\delta^2(Y_2+Y_3+g_3^{opt}Y_4)\rangle$. (i) The QNL; (ii) The correlation noise power. The measurement parameters of SA: RBW 30kHz; VBW 100Hz.

During the experiment, we adjusted the temperature of the PPKTP crystal in the OPO1 to 23.78 ^0C firstly to produce a pair of the signal at 852.35 nm and the idler at 746.64 nm, which were split by a beam splitter (BS1). The wavelength of the signal beam was at a transition of the cesium atoms exactly. When the pump power at 398 nm is 118 mW, the power of the output subharmonic wave is 17 mW. Tuning the temperature of the PPLN in NOPO2 to 154.0 ^0C, the wavelength of the signal and the idler output from the NOPO2 were 1550.60 nm and 1440.06 nm, which were split by a beam splitter (BS2). Under the pump power of 14.6 mW, the output power of the signal and the idler light from NOPO2 was 3.2 mW.

The measured correlation variances of the noise powers of the amplitude and the phase quadratures among the three resultant optical beams at 852.35 nm, 1550.60 nm and 1440.06 nm in term of Eqs. (1) are shown in Fig. 3 (a)-(f), where the traces (i) and the traces (ii) stand for the QNLs and the correlation variances, respectively. From Fig. 3 we have $\langle\delta^2(X_3-X_4)\rangle = -4.1\pm0.1dB$, $\langle\delta^2(g_1^{opt}Y_2+Y_3+Y_4)\rangle = -1.1\pm0.1dB$, $\langle\delta^2(X_2-X_3)\rangle = -3.2\pm0.1dB$, $\langle\delta^2(Y_2+g_2^{opt}Y_3+Y_4)\rangle = -0.5\pm0.1dB$, $\langle\delta^2(X_2-X_4)\rangle = -3.2\pm0.1dB$ and $\langle\delta^2(Y_2+Y_3+g_3^{opt}Y_4)\rangle = -0.5\pm0.1dB$. Where, the minus symbol before the first numbers in the right sides of these equalities means that the variances are below the corresponding QNL and g_j^{opt} ($j = 1, 2, 3$) stand for the optimal gain values of g_j taken in the experiment for obtaining the highest correlations [24]. The three combinations of the correlation variances in Eqs. (1) are $\Delta_1 = 3.03\pm0.06$, $\Delta_2 = 3.68\pm0.05$ and $\Delta_3 = 3.68\pm0.05$ respectively and all of them are smaller than the criteria ”4” for the CV three-partite entanglement of optical modes. Thus, the three-color CV entanglement is experimentally demonstrated.

For exhibiting the tunable property of NOPO, we measure the function of the wavelength of the output optical modes from NOPO2 vs the temperature of the nonlinear crystal (Fig.4). When the temperature of PPLN is changed from 130 ^oC to 160 ^oC the measured wavelength of the output sig-

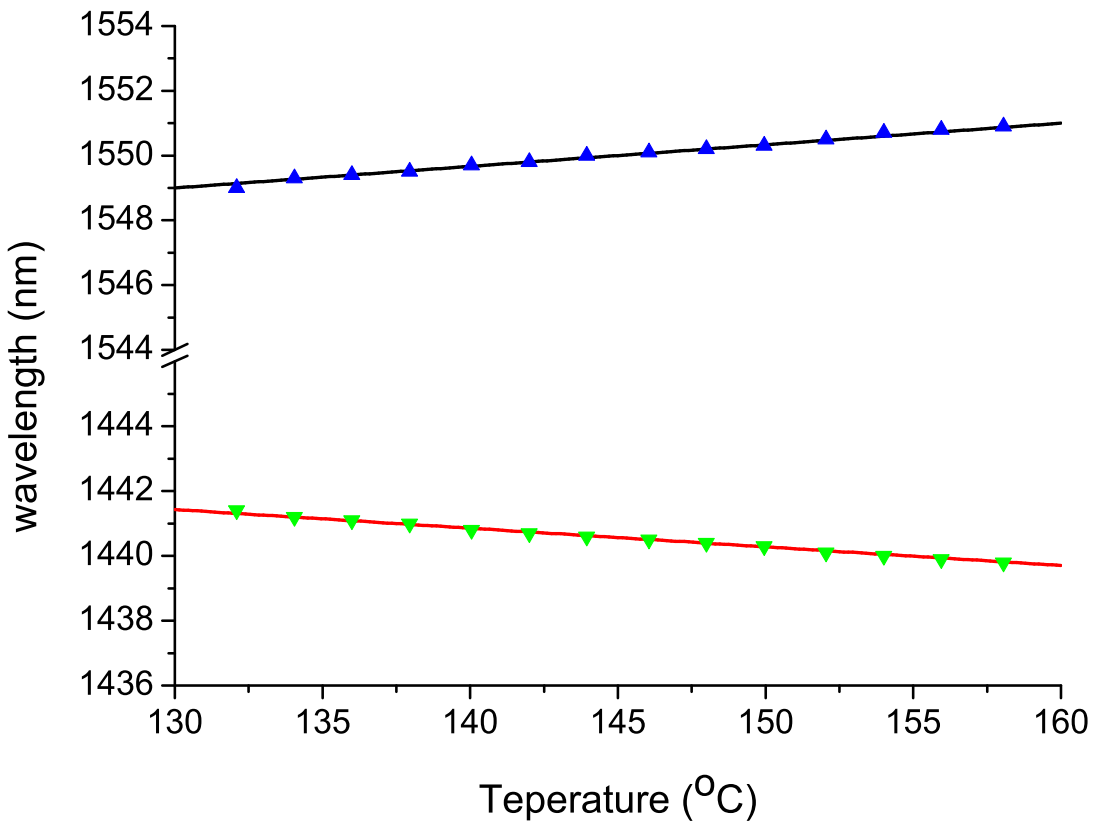

FIG. 4: (Color online) Wavelengths of the output signal and idler beams from the NOPO2 changing with the temperature of the PPLN crystal. The solid line is the calculated curve; ▲ and ▼ are the measured wavelengths of the signal and idler beams, respectively.

nal beam (▲) and idler beam (▼) are changed from 1549.0 nm and 1441.4 nm to 1550.9 nm and 1439.8 nm, respectively. The solid lines are theoretical fitting under the idea phase matching condition. The tuned wavelength range is about 1.9 nm for signal beam. If tuning the temperature of the PPKTP inside NOPO1 the similar tunable property can also be observed. The quality of the three-color entanglement in the tuning range is almost the same. The good agreement between the experimental measurements and the theoretical calculations as well as the perfect linearity of the dependence of the output wavelength on the crystal temperature demonstrate that the NOPO is an idea device for generating the tunable CV entangled states of light.

For the conclusion, we achieve the experimental generation of the three-color CV entangled states of optical modes at the cesium atomic transition and the optical fiber communication frequencies. In the presented scheme with two cascaded NOPOs the reflected pump fields are not involved in the resultant entangled submodes, thus the influence of the larger phonon noise in the reflection light [27, 28] is degraded. Using this system, the entangled states can be prepared under normal phase-matching conditions without the need to cool the system below zero degree [10]. The free-selectivity of two nonlinear crystals in the two cascaded NOPOs and the tunable property of NOPO provide large ranges of frequency-selection for the three-color entanglement. If NOPOs more than two are cascaded the multi-color CV entangled states with needed frequencies more than three are able to be generated based on the presented method.

This research was supported by National Basic Research Program of China (Grant No. 2010CB923103), Natural Science Foundation of China (Grants Nos. 11074157, 61121064 and 11174188), the TYAL.

[1] A. Galindo and M. A. Martin-Delgado, Rev. Mod. Phys. **74**, 347 (2002).
[2] D. Bouwmeester, J. Pan, K. Mattle, M. Eibl, H. Weinfurter and A. Zeilinger, Nature (London) **390**, 575 (1997).
[3] S. L. Braunstein and P. van Loock, Rev. Mod. Phys. **77**, 513 (2005).
[4] M. D. Reid, P. D. Drummond, W. P. Bowen, E. G. Cavalcanti, P. K. Lam, H. A. Bachor, U. L. Andersen and G. Leuchs, Rev. Mod. Phys. **81**, 1727 (2009).
[5] H. J. Kimble, Nature (London) **453**, 1023 (2008).
[6] A. S. Villar, L. S. Cruz, K. N. Cassemiro, M. Martinelli and P. Nussenzveig, Phys. Rev. Lett. **95**, 243603 (2005).
[7] X. L. Su, A. H. Tan, X. J. Jia, Q. Pan, C. D. Xie and K. C. Peng, Opt. Lett. **31**, 1133 (2006).
[8] J. T. Jing, S. Feng, R. Bloomer and O. Pfister, Phys. Rev. A **74**, 041804 (2006).
[9] G. Keller, V. D'Auria, N. Treps, T. Coudreau, J. Laurat and C. Fabre, Opt. Express **16**, 9351 (2008).
[10] A. S. Coelho, F. A. S. Barbosa, K. N. Cassemiro, A. S. Villar, M. Martinelli and P. Nussenzveig, Science **326**, 823 (2009).
[11] Z. Y. Ou, S. F. Pereira, H. J. Kimble and K. C. Peng, Phys. Rev. Lett. **68**, 3663 (1992)
[12] A. Furusawa J. L. Sorensen, S. L. Braunstein, C. A. Fuchs, H. J. Kimble and E. S. Polzik, Science **282**, 706709 (1998).
[13] J. T. Jing, J. Zhang, Y. Yan, F. G. Zhao, C. D. Xie and K. C. Peng, Phys. Rev. Lett. **90**, 167903 (2003)
[14] X. J. Jia, X. L. Su, Q. Pan, J. R. Gao, C. D. Xie and K. C. Peng, Phys. Rev. Lett. **93**, 250503 (2004).
[15] X. J. Jia, J. Zhang, Y. Wang, Y. P. Zhao, C. D. Xie and K. C. Peng, Phys. Rev. Lett. **108**, 190501 (2012).
[16] Y. M. Li, X. M. Guo, Z. L. Bai and C. C. Liu, App. Phys. Lett. **97**, 031107 (2010).
[17] A. S. Villar, M. Martinelli, C. Fabre and P. Nussenzveig, Phys. Rev. Lett. **97**, 140504 (2006).
[18] S. Zhai, R. Yang, D. Fan, J. Guo, K. Liu, J. Zhang and J. Gao, Phys. Rev. A **78**, 014302 (2008).
[19] K. N. Cassemiro and A. S. Villar, Phys. Rev. A **77**, 022311 (2008).
[20] A. H. Tan, C. D. Xie and K. C. Peng, Phys. Rev. A **85**, 013819 (2012).
[21] Y. Gu, G. Q. He and X. F. Wu, Phys. Rev. A **85**, 052328 (2012)
[22] H. Hubel, D. R. Hame, A. Fedrizzi, S. Ramelow, K. J. Resch and T. Jennewein, Nature **466**, 601 (2010).
[23] J. C. Palais, *Fiber Optic Communications* (Prentice Hall, New Jersey, United States, 2004).
[24] P. van Loock and A. Furusawa, Phys. Rev. A **67**, 052315 (2003).
[25] O. Glockl, U. L. Andersen, S. Lorenz, Ch. Silberhorn, N. Korolkova and G. Leuchs, Opt. Lett. **29**, 1936 (2004).
[26] D. Wang, Y. N. Shang, Z. H. Yan, W. Z. Wang, X. J. Jia, C. D. Xie and K. C. Peng, EPL **82**, 24003 (2008).
[27] K. N. Cassemiro, A. S. Villar, M. Martinelli and P. Nussenzveig, Opt. Express **15**, 18236 (2007).
[28] J. E. S. Cesar, A. S. Coelho, K. N. Cassemiro, A. S. Villar, M. Lassen, P. Nussenzveig and M. Martinelli, Phys. Rev. A **79**, 063816 (2009)